



125mm 850W Angle grinder







Soft grip handle
Auto stop brush
Quick guard adjustment
2 position auxiliary handle
Spindle lock

Specifications

Slide on-off switch

Volts	220-240 V ~ 50/60H
Input power	850 V
No-load speed	10000 /mi
Disc size	115 mr
Disc bore	22.2 mr
Spindle thread	M1
Cable	3.0 r
Machine weight	1.7 k

Wu707- Wu707.1*

Equipment

1 pc auxiliary handle	44	
CONTRACTOR NAMED		
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
CAM		-
		14.0
100	1	8
		100
1. T.	The state of the s	
()	No. of the last of	

Master Carton

Size 440x353x254mm	QTY 6 p
Size 453x423x318mm	QTY 3 p

*same as WU707 with carry case

Features

1 Callin	
Soft grip	nandle
Auto stop	brush
Quick gu	ard adjustment
Anti-vibra	tion auxiliary handle
Spindle lo	ck.
Slide on-	off switch

Wu708- Wu708.1*

PROFESSIONAL

Specifications

Obcollog (1-110	
Volts	220-240 V ~ 50/60Hz
Input power	850 W
No-load speed	10000 /min
Disc size	125 mm
Disc bore	22.2 mm
Spindle thread	M14
Cable	3.0 m
Machine weight	1.7 kg

Master Carton

Equipment

1 pc spanner

1 pc anti-vibration auxiliary handle

WU708	Size 455x375x260mm	QTY 6 po
WU708.1	Size 453x423x318mm	-QTY 3 po
		42

NEW

125mm 1050W Angle grinder







Features

Soft grip handle

Variable speed control

Auto stop brush

Quick guard adjustment

Anti-vibraţion auxiliary handle

Spindle lock

Slide on-off switch

Specifications

Volts	220-240 V ~ 50/60Hz
Input power	850 W
No-load speed	2800-10000 /mir
Disc size	125 mm
Disc bore	22.2 mm
Spindle thread	M14
Cable	3.0 m
Machine weight	1.7 kg

Wu709- Wu709.1*

Equipment

1 pc anti-vibration auxiliary handle

Master Carton

 WU709
 Size 455x375x260mm
 QTY 6 pcs

 WU709.1
 Size 453x423x318mm
 QTY 3 pcs

ame as WU709 with carry cas

<u>Features</u>

Soft start

Constant speed control

Soft grip handle

Auto stop brush

Quick guard adjustment

Anti-vibration auxiliary handle

Spindle lock

Slide on-off switch

Specifications

Volts	220-240 V ~ 50/60Hz
Input power	1050 W
No-load speed	10000 /min
Disc size	125 mm
Disc bore	22.2 mm
Spindle thread	M14
Cable	3.0 m
Machine weight	1.7 kg
5 1 P. M. C.	b.,

Wu721- Wu721.1*

Equipment

1 pc spanner
1 pc anti-vibration auxiliary handle

aster	Carton	

 WU721
 Size 455x375x260mm
 QTY 6 pcs

 WU721.1
 Size 453x423x318mm
 QTY 3 pcs

*same as WU721 with carry case











Features

Soft start

Constant speed control

Soft grip handle

Variable speed control

Auto stop brush

Quick guard adjustment

Anti-vibration auxiliary handle

Spindle lock

Slide on-off switch

Specifications

Volts	220-240 V ~ 50/60H
Input power	1050 V
No-load speed	2800-10000/mil
Disc size	125 mn
Disc bore	22.2 mn
Spindle thread	M1
Cable	3.0 n
Machine weight	1.7 kg
· · · · · · · · · · · · · · · · · · ·	

Wu722- Wu722.1*

Equipment

1 pc ant	i-vibration a	uxiliary hand	dle		
-	. Drive	No.	9.0		
1000	1	1000	4.0	9	
- *	728	100		Table	
1.54	100	200			60.7
			1	14	8
1	X.00	11.5		1	- 1
153	1	1 3 .	2.00	100	
Y	1.0	- X	10011		

Master Carton

WU722.1	Size 453x423x318mm	QTY 3 po
WU722	Size 455x375x260mm	QTY 6 po

*same as WU722 with carry case

Features

Soft start

3 positions auxiliary handle

Ergonomic handle with soft grip

Lock-on and lock-off switch

Auto stop brush

External brush change

Spindle lock

Specifications

And the state of t	
Volts	220-240 V ~ 50/60Hz
Input power	2000 W
No-load speed	8000 /min
Disc size	180 mm
Disc bore	22.2 mm
Spindle thread	M14
Machine weight	4.5 kg

Wu736-Wu736.1*

Equipment

WORX

<u>Edutine</u>				
1 pc spanner		- 1		
1 pc auxiliary handle		- 3		mar.
		. 9. 7	1	
			1.5	14
		- 7		
				7 -1
	*	- 35	1	
	. 51	1 + 46-	10/60	

Master Carton

NU736	Size 590x195x310mm	QTY 2 pc
NU736.1	Size 588x400x353mm	-QTY 2 pc

*same as WU736 with carry case

NEW

230mm 2000W Angle grinder







Features

Soft start

3 positions auxiliary handle

Ergonomic handle with soft grip

Lock-on and lock-off switch

Auto stop brush

External brush change

Spindle lock

Specifications

Volts	220-240 V ~ 50/60H
Input power	2200 V
No-load speed	8000 /mii
Disc size	180 mn
Disc bore	22.2 mn
Spindle thread	M14
Machine weight	4.5 k <u>ı</u>

Wu737- Wu737.1*

Equipment

1 pc auxiliary handle

Master Carton

 WU737
 Size 590x195x310mm
 QTY 2 pcs

 WU737.1
 Size 588x400x353mm
 QTY 2 pcs

*same as WU737 with carry case

Features

Soft start

3 positions auxiliary handle

Ergonomic handle with soft grip

Lock-on and lock-off switch

Auto stop brush

External brush change

Spindle lock

Specifications

 Volts
 220-240 V ~ 50/60Hz

 Input power
 2000 W

 No-load speed
 6500 /min

 Disc size
 230 mm

 Disc bore
 22.2 mm

 Spindle thread
 M14

 Machine weight
 4.5 kg

Wu743- Wu743.1*

Equipment

1 pc spanner
1 pc auxiliary handle

aster Carton	
--------------	--

 WU743
 Size 590x195x310mm
 QTY 2 pcs

 WU743.1
 Size 588x400x353mm
 QTY 2 pcs

*same as WU743 with carry case



650W JigSaw



Features

Soft start

3 positions auxiliary handle

Ergonomic handle with soft grip

Lock-on and lock-off switch

Auto stop brush

External brush change
Spindle lock

Specifications

Volts	220-240 V ~ 50/60H.
Input power	2200 V
No-load speed	6500 /mii
Disc size	230 mn
Disc bore	22.2 mn
Spindle thread	M1
Machine weight	4.5 kg
	h.

Wu745- Wu745.1*

Equipment

1 pc spanner
1 pc auxiliary handle

Master Carton

 WU745
 Size 590x195x310mm
 QTY 2 pcs

 WU745.1
 Size 588x400x353mm
 QTY 2 pcs

*same as WU745 with carry case

Features

4 positions pendulum actions

Variable speed dial

Tool-Free blade change system

Aluminium base-plate

Lock on button

Dust extraction facility

Adjustable cutting angle

Soft overmould handle

Specifications

	220-240 V ~ 50/60Hz
	650 W
	500-3000 spm
	24 mm
	0±45°
wood	100 mm
aluminium	20 mm
steel	10 mm
	3.0 m
	2.5 kg
	aluminium

Wu460

Equipment

1 pc wood cutting blade (100 mm x 10 TPI, HCS)

1 pc metal cutting blade (92mm x 21TPI , BIM)

1 pc aluminium cutting blade (100mm x 8TPI , HSS)

1 pc parallel guide

1 pc dust tube

1 pc hex key

Carry case

Master Carton Size 458x450x350mm

QTY 3 pcs

650W JigSaw with light



Features

4 positions pendulum actions

Variable speed control

Tool-Free blade change system

Aluminium base-plate

LED work light

Dust extraction facility

Adjustable cutting angle

Soft overmould handle

Specifications

Obcollogi-lin		
Volts		220-240 V ~ 50/60H
Input power		650 V
No-load speed		500-3000 spr
Stroke length		24 mr
Bevel capacity		0±45
Cutting capacity	wood	100 mr
	aluminium	20 mr
	steel	10 mr
Cable		3.0 r
Machine weight		2.5 k

Wu463

QTY 3 pcs

Equipment

1 pc wood cutting blade (100 mm x 10 TPI, HCS)

1 pc metal cutting blade (92mm x 21TPI , BIM)

1 pc aluminium cutting blade (100mm x 8TPI , HSS)

1 pc parallel guide

1 pc dust tube

1 pc hex key

Carry case

Master Carton Size 458x450x350mm

Tool-Free blade change system
Aluminium die cast gear case
Rubber front boot
Variable speed switch with soft grip
Adjustable pivot foot plate
Soft overmould handle

750W Reciprocating saw

Specifications

Volts		220-240 V	~ 50/60Hz
Input power		1	750 W
No-load speed		0-	-2600 spm
Stroke length		, All I	28 mm
Cutting capacity	wood	1	275 mm
18-1	steel		13 mm
Mary Comment	PVC pipe		150 mm
Cable		0-3	3.0 m
Machine weight	1	6.	3.4 kg

Wu400

quipment

WORX

1 pc metal cutting blade (150 mm x 18 TPI, BIM)

Carry case

Master Carton Size 630x410x290mm QTY 3 pcs

72

73



1400W Reciprocating





vibrafree™

Features

Counter balance system Tool-Free blade change system Tool-Free adjustable pivot foot plate 4 position pendulum action Aluminium diecast gear case Rubber front boot Variable speed switch with soft grip Soft overmould handle

Specifications

External brush change

Volts		220-240	V ~ 50/60H
Input power	- 1		1200 V
No-load speed		100	0-3000 spn
Stroke length		100	32 mn
Cutting capacity	wood		275 mn
18-11	steel		13 mn
	PVC pipe	7	150 mn
Cable	1	(3)	3.0 n
Machine weight	1	6.	4.2 k
1			
- The state of the	2	-	

Wu404

QTY 3 pcs

1 pc metal cutting blade (150 mm x 18 TPI, BIM)

Master Carton Size 630x410x290mm

Tool-Free adjustable pivot foot plate 4 position pendulum action

Aluminium diecast gear case

Counter balance system

vibrafree[™]

6 positions variable speed dial Rubber front boot

Tool-Free blade change system

Soft overmould handle External brush change

Features

Specifications

Sheothoutialia		
Volts		220-240 V ~ 50/60Hz
Input power		1400 W
No-load speed		0-3000 spm
Stroke length		32 mm
Cutting capacity	wood	300 mm
	steel	20 mm
	PVC pipe	150 mm
Cable		3.0 m
Machine weight		4.4 kg

Wu407

-QTY 3 pcs

1 pc metal cutting blade (150 mm x 18 TPI, BIM) Carry case

Master Carton Size 630x410x290mm

190mm 1400W Circular saw





Features

	190 mm 241 TCT blade
	Aluminium base plate
	Spindle lock
	Adjustable bevel angle
	Rear ejection vacuum adapter
	Soft grip handle
	Lock off switch
	Large rubber covered comfort trigger

Specifications

والمراجع والم والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراج		
Volts	'	220-240 V ~ 50/60Hz
Input power		1400 W
No-load speed		4800 /min
Blade size		190 mm
Blade bore		30 mm
Bevel		up to 45°
Cutting capacity	at 90°	65 mm
	at 45°	49 mm
Cable		3.0 m
Machine weight		4.3 kg

Wu430-Wu430.1*

Equipment

4T
7 7 2
14.00
Ly

Size 582x458x381mm

Size 450x300x410mm

QTY 2 pcs

QTY 2 pcs

190mm 1500W Circular Saw



Features

10dtg:00	
Magnesium alloy upper and lower guard	
Bevel capacity up to 56° with positive stop on 45°	
Sight line	
Aluminum base plate	
Flat cap design for easy blade changing	
Rear ejection vacuum adapter	
External brush change	

Specifications

Soft grip handle

			43 1 9
Volts		220-240	V ~ 50/60Hz
Input power		4	1500 W
No-load speed		- 1	5000 /min
Blade size		207	190 mm
Blade bore	7		30 mm
Bevel	1		up to 56°
Cutting capacity	at 90°		66 mm
10/	at 45°	000	48 mm
Cable			3.0 m
Machine weight		100	4.3 kg

Wu433-Wu433.1*

Figurification		
1 pc vacuum adaptor		
1 pc parallel guide		
1 pc saw blade 190x30x24T	15.34	
1 pc spanner	(
Carry case	Mary Street	
E la-feek to the second	Section 1	2
		1 8
		4
AR	The state of the state of	2

WU433	Size 582x458x381mm	QTY 2 pcs
WU433.1	Size 450x300x410mm	QTY 2 pcs
*same as WU43	4 1 1 1	

Master Carton

WU430

WU430.1



Features

254 mm TCT blade

Motor brake

External brush change

9 positive stops

Spindle lock Carry handle

Extention rails

Rubber covered D handle

Specifications

Volts		220-240 V ~ 50/60Hz
Input power	2.	1800 W
No-load speed		5000 /mir
Blade size	10.10	254 mm
Blade bore	- V	30 mm
Blade teeth		40 7
Cutting capacity	mitre 0°/bevel 0°	154x57 mm
111	mitre 0°/bevel 45°	154x38.5 mm
1	mitre 45°/bevel 0°	113.6x57 mm
The same	mitre 45°/bevel 45°	113.6x38.5 mm
Cable	1 1	2.0 m
Machine weight	1 77	15 kg
1 of the in	4	

Wu480

Equipment

1 pc spanner

1 pc dust bag and 1pc adapter

1 set extention rails

1 set quick clamp vice

1 pc blade 254 mm x 40T

Master Carton Size 593x487x435mm QTY 1 pc

254mm TCT blade Motor brake

Features

Laser guide

External brush change

254mm 1**8**00**W** Miter saw with laser

9 positive stops

Spindle lock Carry handle

Extention rails

Rubber covered D handle

Specifications

Volts	22	20-240 V ~ 50/60Hz
Input power		1800 W
No-load speed		5000 /min
Laser class		3 A
Blade size		254 mm
Blade bore		30 mm
Blade teeth		40 T
Cutting capacity	mitre 0°/bevel 0°	154x57 mm
	mitre 0°/bevel 45°	154x38.5 mm
	mitre 45°/bevel 0°	113.6x57 mm
	mitre 45°/bevel 45°	113.6x38.5 mm
Cable		2.0 m
Machine weight		15 kg

Wu481

Equipment

1 pc spanner 1 pc dust bag and 1pc adapter 1 set extention rails 1 set quick clamp vice 1 pc blade 254 mm x 40T 1 set laser kit

Master Carton Size 593x487x435mm

QTY 1 pc

78

79



Features

Rubber covered horizontal D handle
Locking vise with quick release
External brush change
Carry handle
Spindle lock
Spanner storage

355mm 2300W Cut off Saw -

Specifications

Volts		220-240 V ~ 50/60Hz
Input power		2300 W
No-load speed		3500 /min
Disc size		355 mm
Disc bore		25.4 mm
Cutting capacity	Sqaure	120x120 mm
	Rectangle	75x235 mm
	L-shape	137x137 mm
	Round	125x125 mm
Cable		2.0 m
Machine weight		18.5 kg

Wu760


Equipment

1 pc spanner
1 pc blade 355 mm x 25.4

Master Carton Size 570x360x445mm QTY 1 pc



Sand up to twice as tast with half the vibration

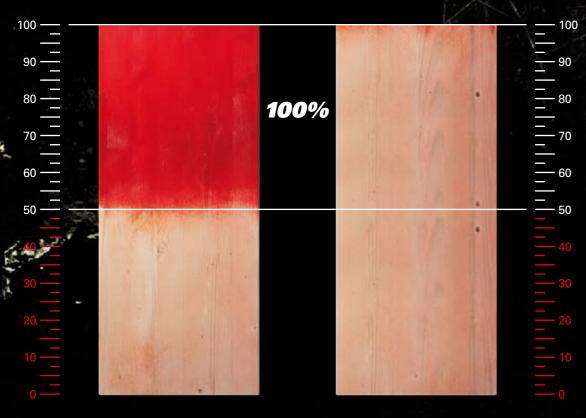

Competitor



lower is not always safer... What may be true for driving a car, can be the opposite when it comes to working with a Worx VibraFree sander. VibraFree dramatically increases your productivity, up to 100%, while keeping feedback vibration extremely low. How is it possible? VibraFree Active Canceling Technology recycles feedback vibration back to the work piece rather than to your hand and at the same time maximizes the power that goes into sanding.




active cancelling technology

The concentration of the concentration of

82

Our new sander is a breath of fresh air

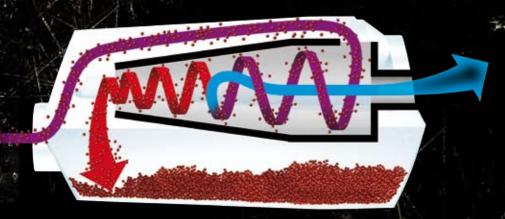

nlike conventional filters that try to trap dust inside a bag, Worx Cyclonic Dust Separator effectively separates dust from the air. While normal dust filters suffer from loss of suction as they clog with use, suction remains constant with Worx CDS. As an additional benefit, the air expelled from the CDS system is cleaner for a healthier work environment.

No more replacing paper bags or emptying cloth bags... getting rid of dust is as easy as the click of a button.







300W Random orbital sander







VIbrafree™

CDS 4// CyclonicDust/airSeparator

Features

Vibra-free

125mm hook and loop pad

Overmould soft grip handle

Cyclone dust box

Rotation plate brake

Sealed rocker switch

Specifications

10 10 10 10 10 10 10 10 10 10 10 10 10 1
220-240 V ~ 50/60H:
300 W
12000 opn
125mm
125mm
1.6mm
3 m
1.5 kg

WU651

Equipment

5pcs sanding paper(120#)
5pcs sanding paper(180#)
5pcs sanding paper(60#)
1pc vacuum adapter
1pc cyclone dust box
Carry case

Master Carton Size 524x415x283mm

QTY 3 Pcs

Features

Wire paper clamp with hook and loop pad
Aluminium base plate
Dust bag
Soft grip handle
Sealed rocker switch
Ergonomic fulsh handle

Specifications

Volts	230-240 V ~ 50Hz
Input power	240 W
No-load speed	15000 opm
Base plate size	103x100 mm
Sanding paper size	1/4 sheet
Orbital diameter	1.6 mm
Cable	3.0 m
Machine weight	1.2 kg

WU645

Equipment

1 pc sanding paper (120#)

1 pc paper hole punch

1 pc dust bag

Carry case

Master Carton Size 524x415x283mm

-QTY 3 pcs

Random orbital sander

300M 1/3 Sheet jinishing sander







Features

125 mm hook and loop pad Variable speed dial Overmould soft grip handle Adjustable auxiliary handle Dust bag Rotation plate brake Lock on switch

Specifications

Volts	220-240 V ~ 50/60Hz
Input power	450 W
No-load speed	5000-12000 opm
Base plate size	125 mm
Sanding paper size	125 mm
Orbital diameter	5.0 mm
Cable	3.0 m
Machine weight	1.5 kg

WU652

QTY 3 pcs

Equipment

1 pc sanding paper (120#)	
1 pc dust bag	
1pc vacuum adapter	7 - 1 - 2 - 2 - 3
Carry case	
	- 14 15 - 14 15 15 15 15 15 15 15 15 15 15 15 15 15
*	
11 1 24	200
	A DATE OF
	WAR TO BE TO THE PARTY OF THE P
	- Charles I lake and
	do la

Aluminium base plate Dust bag

Features

Soft overmould handle

Aluminium dust fan housing

Large switch trigger with variable speed

Wire paper clamp with hook and loop pad

Ergonomic fulsh handle

Lock on button

Specifications	
Volts	230-240 V ~ 50Hz
Input power	300 W
No-load speed	6000-12000 opm
Base plate size	92x180 mm
Sanding paper size	93x230 mm
Orbital diameter	2.4 mm
Cable	3.0 m
Machine weight	1.7 kg
X X	b

Wu644

Equipment		
1 pc sanding paper (120#)		
1 pc paper hole punch		٥,
1 pc dust bag		
1 pc vacuum adapter		
Carry case		40
	0 =	
	4	8
	×	
AS 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		

QTY 3 pcs Master Carton Size 453x423x318mm

Master Carton Size 465x433x333mm

350W 1/2 Sheet phishing sander





Features

Wire paper clamp with hook and loop pad

Aluminium base plate

Dust bag

Soft overmould handle

Large switch trigger with variable speed

Ergonomic flush handle

Lock on button

Wu641

Specifications

Volts	220-240 V ~ 50/60H
Input power	350 V
No-load speed	6000-11000 opn
Base plate size	113x225 mn
Sanding paper size	115x280 mn
Orbital diameter	2.4 mn
Cable	3.0 n
Machine weight	2.8 k
1	

Equipment

1 pc sanding paper (120#)	
1 pc paper hole punch	63
1 pc dust bag	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
1 pc vacuum adapter	- P
Carry case	The state of
- 11 X - 12	2 2 1 1 1 W

Master Carton Size 476x438x330mm

QTY 3 pcs

Features

76 x 457 mm sanding belt size

Variable speed dial

Die cast aluminum front

Quick release belt change system

Soft grip handle

Manual alignment knob

Moulded flush front handle

Large comfort switch

Specifications

Volts	220-240 V ~ 50/60Hz
Input power	900 W
No-load speed	150-320 m/mir
Belt size	76x457 mm
Cable	3.0 m
Machine weight	3.6 kg

WU661

Equipment		0.00	
1 pc sanding belt			
1 pc dust bag		- 200	
Carry case		9) X Y	
		1 5	
		7	
		-	1
	*	10.	1
	210	10/10	
	F	2001	-4"

Master Carton Size 480x460x320mm

QTY 2 pcs

3"X 21" 1050W Belt sander

MENT

3"x 21" 1050W Belt Sander





THORIS OF THE PARTY OF THE PART

Features

76x533mm sanding belt size

Compact size and flap top design

Aluminium base construction

Variable speed dial

Quick release belt change system

Soft grip handle

Belt centering system adjustment

Large comfort switch

Specifications

Volts	220-240 V ~ 50/60Hz
Input power	1050 W
No-load speed	450m/min
Belt size	76x533mm
Cable	3.0 m
Machine weight	4.5 kg

WU662

Equipment

92

1 pc sanding belt	
1 pc dust bag	
Carry case	2 - 1 - 2-6
	7
= =	14 S

Master Carton Size 480x460x320mm

QTY 2 Pcs

Features

76x533mm sanding belt size
Compact size and flap top design
Aluminium base construction
Quick release belt change system
Soft grip handle
Belt centering system adjustment
Large comfort switch

Specifications

Obcollingfi-lin	6 1 9
Volts	220-240 V ~ 50/60Hz
Input power	1050 W
No-load speed	220-450m/min
Belt size	76x533mm
Cable	3.0 m
Machine weight	4.5 kg
	[20.0]

Wu663

Equipment 1 pc sanding belt 1 pc dust bag Carry case

			1
			/ the
Master Carton	Size 480x460x320mm	-	OTY 2 Pcs

93

3"X 24" 1050W Belt Sander

4"x 24" 1050W Belt sander







Features

76x610mm sanding belt size

Compact size and flap top design Aluminium base construction

Variable speed dial

Quick release belt change system

Soft grip handle

Belt centering system adjustment

Large comfort switch

Specifications

Volts

Input power

Belt size

Cable

No-load speed

Machine weight

Equipment 1 pc sanding paper

1 pc dust bag

220-240 V ~ 50/60Hz

1050 W

3.0 m

4.6 kg

220-450m/min

76x610mm

WU664

Features

100x610mm sanding belt size

Aluminium base construction

Variable speed dial

Soft grip handle

Large comfort switch

Specifications

Compact size and flap top design

Quick release belt change system

Belt centering system adjustment

220-240 V ~ 50/60Hz 1050 W Input power No-load speed 220-450m/min Belt size 100x610mm Cable 3.0 m 4.7 kg Machine weight

WU665

Equipment

1 pc sanding paper 1 pc dust bag Carry case

Master Carton Size 480x460x320mm

QTY 2 Pcs

Master Carton Size 480x460x320mm

QTY 2 Pcs

1800W Router



Soft start

Micro depth adjustment

Spindle lock

Soft grip ergonomic handles

Aluminium base

Preset plunge depth stop

Specifications

Volts	220-240 V ~ 50/60Hz
Power input	1800 W
No-load speed	11500-28000 /min
Collet size	6.35 mm and 12.7 mm
Plunge depth	55 m
Cable	3.0 m
Machine weight	4.3 kg

Wu601- Wu601.1*

QTY 2 Pcs

Equipment

Carry case	*	1 32. 3	
1 pc centering pin	with ring scr	ew	7
1 pc template guid	de		
1 pc dust adapter		- 1 V	
1 pc copy follower	r		-
1 pc 6.35 mm and	l 1pc 12.7 mr	n collet	
1 pc spanner		25012	
1 set parallel guide	Э	1.5	

Master Carton Size 480x435x417mm *same as WU601 with 8/12mm collet size

710W Planer



Features

Left or right side dust ejection

Aluminium base with V-groove

Rear handle with soft grip

External brush change

Rest stand

Front depth adjustable knob

Larger rubber covered comfort switch

Lock off switch

Specifications

Volts	220-240 V ~ 50/60Hz
Input power	710 W
No-load speed	16000 /min
Adjustable planing depth	2 mm
Planing width	82 mm
Rebate capacity	9 mm
Cable	3.0 m
Machine weight	2.8 kg
X X	b

WU621

Equipment

Educations		
Rebate and parallel guide	1 N	-
1 set TCT blade	430	- 6
1pc spanner	0 1534	
Carry case	4	
TAX TO THE PARTY OF THE PARTY O	" of K" on Lor	
E IN COLUMN	green A .	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1	8
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

QTY 3 Pcs Master Carton Size 680x433x306mm

Mho says a too has to stay the same forever?



orx Revolver is the first and only line of power tools that adapt themselves to fit your body rather than requesting your body to adapt to fit the tool. Thanks to its revolutionary handle adjustment, there's virtually no task a Revolver power tool cannot manage while ensuring extra comfort, efficient transmission of your force and maximum control.

REYNYER

Still power tools, just reinvented





Revolver™ adjustable grip with 60° angle of rotation

	220-240V~50/60Hz
	600 W
	0-3000/min
	10 mm
wood	25mm
steel	10 mm
	3.0 m
	2.3 kg

WT101KE

Equipment

1 pc auxiliary handle 1 pc depth stop carry case

Master Carton Size 458x450x315mm

QTY 3 Pcs

BlockBusterTM 710W Hammer drill



Features

Revolver™ adjustable grip with 60° angle of rotation

13mm Keyless chuck

Serviceable brushes

REVOLOCK. revolving handle locking and safety mechanism

Specifications

Shecilications		D. 1. 1.
Volts	22	0-240 V ~ 50/60H
Power input		710 V
No-load speed	t-	0-3000 /mi
Impact rate		0-48000 bpn
Chuck capacity		13 mn
Drilling capacity	wood	35 mn
18-1	masonry	20 mn
Mark Market	steel	13 mn
Cable	1	3 n
Machine weight	1	2.5 k

WT301KE

QTY 3 Pcs

Equipment

1 pc auxiliary handle
1 pc depth stop
carry case

Master Carton Size 458x450x315mm





BladeRunnerTM 1500W circular Saw



Features

Revolver Fluid Motion™with 50°angle of rotation

Die-cast magnesium foot plate, upper and lower blade guards Serviceable brushes

Specifications

Volts	220-240V~50/60Hz
Input power	1500 W
No-load speed	5000 min
Blade size	185 mm
Arbor size	16 mm
Bevel capacity	0 - 45°
Cutting capacity	62 mm @ 90°; 46 mm @ 45°
Cable	3 m
Machine weight	4.3 kg
BOOK THE STATE OF	

WT431KE

1pc Tungsten Carbide Tipped Blade 1pc Blade wrench 1pc Rip fence

Master Carton Size 582x458x381mm

QTY 2 Pcs



Features

Revolver™ adjustable grip with 60° angle of rotation

Orbital action

Keyless blade clamp system

Counter-balance mechanism

100% rubber front boot

Die-cast aluminum gear case

Serviceable brushes
Adjustable front shoe

Specifications

AT A SALE SALE SALE		
Volts		220-240 V ~ 50/60H
Power input		800 V
No-load speed		0-2700 spn
Stroke length		28 mr
Cutting capacity		13 mn
Drilling capacity	wood	280 mn
	steel	13 mn
	PVC pipe	150 mn
Cable		3 n
Machine weight		4.5 k

WT401KE

Equipmen

1pc metal cutting blade:150mmx18TPI,BIM carry case

Horizontal, vertical, overhead...

TOP NEW INNOVATIONS 2006

Preferred by the experts

The Assault has been recognized by the readers of Tools of the Trade magazine as one of the Top New Innovations in power tools for 2006

Unique handle adjustment for a wide variety of applications and operating positions

Heavy-duty case

All purpose

Wood, metal, plastic and even bricks: just place the proper blade on, and the

Assault becomes your best

companion on the jobsite

The Worx case is robust and designed for the toughest workplaces

Master Carton Size 535x480x340mm

QTY 3 Pcs

100

107



Reach places you never could before



eed to make that cutout underneath a kitchen sink but there's very little clearance? No sweat. The new Worx Contour jigsaw can take you to places where other jigsaws simply can't. And it's not just about getting into tight places. The Contour also sports a lower center of gravity and a grip design that feels natural in your hand. This means you have better control and maneuverability in any application, tight spot or not.

CONTOUR™





Features

Compact ,light weight and well balance design

Tool-free blade change system

Aluminum base plate

Soft overmold for all touch points

Variable speed dial

Aluminum gear box

Adjustable cutting angle

Specifications

Volts		220-240V~50/60H
Input power		600 V
No-load speed		800-2800 spn
Stroke length		24 mm
Bevel capacity		0±45
Cutting capacity	wood	90 mm
	aluminium	20mm
	steel	10mm
Cable		3 n
Machine weight		2.2 Kg

Wu469- Wu469.1*

Equipment

Carry case

1pc wood cutting blade: 100mm x10TPI , HCS 1pc metal cutting blade: 92mmx21TPI , BIM 1pc aluminium cutting blade: 100mmx8TPI , HSS 1pc hex key 1pc dust cover 1pc dust tube 1pc parallel guide

	The state of the s	
Master	Carton	1
WU469	Size 524x415x283 mm	QTY 3 Pcs
WU469.1	Size 410x345x350 mm	QTY 8 Pcs





All steel construction Instant jaw adjustment Lock and release switch With transport wheel

Tripod base

Specifications

Clamp range	940m
Clamp force	1000
Max load	100
Folded size	773x350x336 m
Standing size	1000x985x885 m
Machine weight	19.6

MU060

1pc log jaw with chain saw clamping vice 1pc welding station

Master Carton Size 830x380x395mm

QTY 1 pc





